



## eBC eB eBG Miniature Circuit Breaker

### 1. General

#### 1.1 Function

Protection of circuits against short-circuit currents,  
protection of circuits against overload currents,  
switch, isolation.

#### 1.2 Selection

Short-circuit current at the circuit-breaker installation point,  
which must always be less than the breaking capacity of  
this device, network normal voltage.

Tripping curves:

#### **B curve (3-5I<sub>n</sub>)**

Protection for people and big length cables in TN and IT  
systems.

#### **C curve (5-10I<sub>n</sub>)**

Protection for resistive and inductive loads with low inrush  
current.

#### **D curve(10-20I<sub>n</sub>)**

Protection for circuits which supply loads with high inrush  
current at the circuit closing  
(LV/LV transformers, breakdown lamps).





#### 1.3 Approvals and certificates

Detailed information, please refer to Certificates Table  
on the last page.

2. Technical data

2.1 Curves

BC, B, BG is of high current limiting performance to limit the destruction energy due to short circuit to the greatest extent.

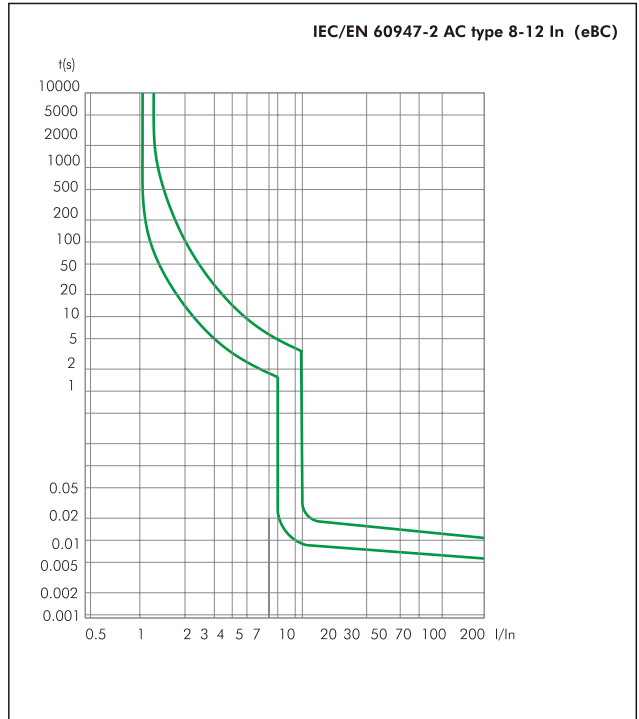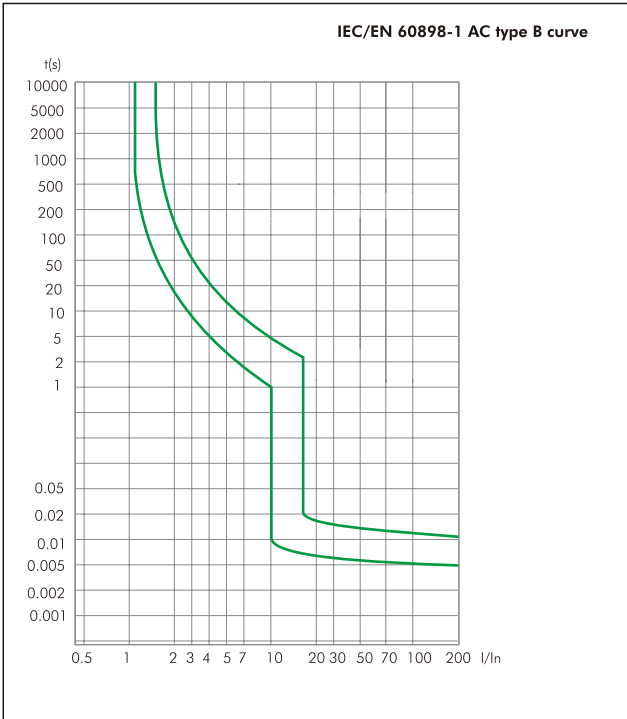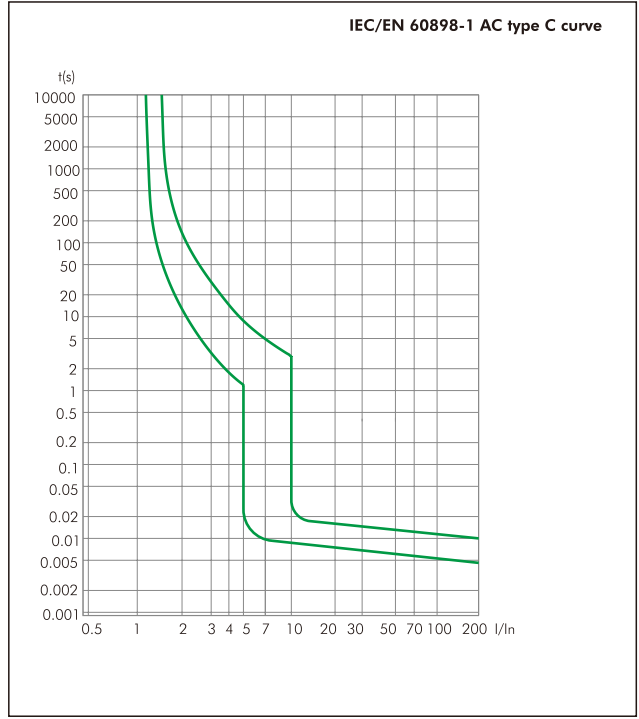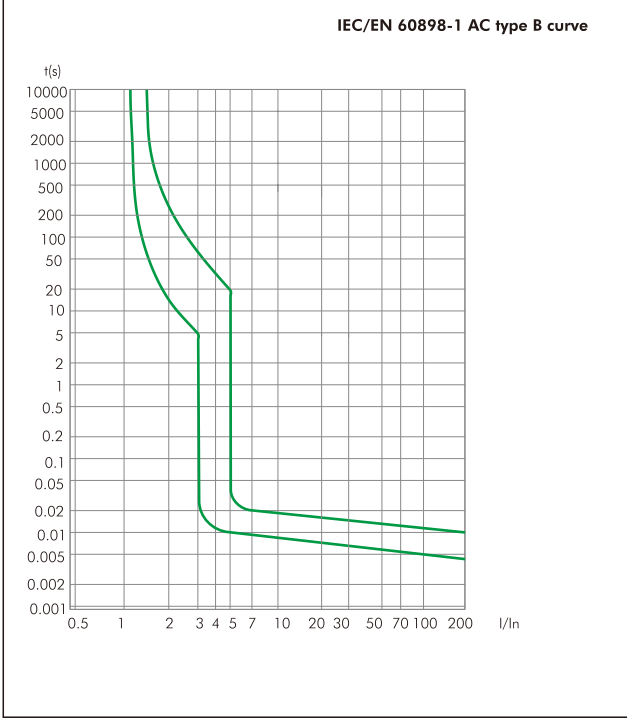

2.2

	Standard		IEC/EN 60898-1	IEC/EN 60947-2
Electrical features	Rated current $I_n$	A	1, 2, 3, 4, 5, 6, 10, 15, 16, 20, 25, 32, 40, 50, 60, 63	
	Poles		1P, 2P, 3P, 4P	
	Rated voltage $U_e$	V	230/400~240/415	
	Insulation voltage $U_i$		500	
	Rated frequency	Hz	50/60	
	Rated breaking capacity	kA	3 (1~63A) eBC 4.5 (1~63A) eB 6 (B,C 1~40A) eBG	
	Rated impulse withstand voltage(1.2/50) $U_{imp}$	V	4000	
	Dielectric test voltage at ind. Freq. for 1 min		2	
	Pollution degree		2	
Thermo-magnetic release characteristic		B, C, D	8-12In	
Mechanical features	Electrical life		4,000	
	Mechanical life		10,000	
	Protection degree		IP20	
	Reference temperature for setting of thermal element	°C	30	
	Ambient temperature (with daily average $\leq 35^\circ\text{C}$ )	°C	-5...+40	
	Storage temperature	°C	-25...+70	
Installation	Terminal connection type		Cable/Pin-type busbar	
	Terminal size top/bottom for cable	mm <sup>2</sup>	1~25	
		AWG	17~3	
	Terminal size top/bottom for busbar	mm <sup>2</sup>	1~10	
		AWG	17~7	
	Tightening torque	N·m	2	
		In-lbs.	18	
Mounting			On DIN rail EN 60715 (35mm) by means of fast clip device	
Connection			From top and bottom	

2.3 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

**The reference temperature is 30°C**

Rated current $I_n$ (A)	Temperature compensation coefficient under various operational temperature									
	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	55°C	60°C	
1~6	1.20	1.14	1.09	1.05	1.00	0.96	0.80	0.75	0.70	
10~32	1.18	1.12	1.08	1.04	1.00	0.96	0.92	0.88	0.84	
40~60	1.16	1.12	1.07	1.03	1.00	0.97	0.87	0.83	0.80	

3. Overall and mounting dimensions (mm)

